

Glide Screen

INSTALLATION INSTRUCTIONS

(MAGNETIC LATCHING SYSTEM)




Measuring and installing for your new retractable screen is quick and simple. The typical installation involves mounting the screen housing and recess mounting clips within the doorjamb area. By following this method the housing simply sets within the profile of the doorjamb where it is totally non-invasive, virtually disappearing! In other flush mount situations (such as single sliding patio doors); surface mount clips are used to achieve an equally simple and attractive installation.

Begin by identifying the area where you will be mounting your screen then measure each dimension as indicated on the diagram. Since door designs vary by style, brand and trim type, please read the "Installation Instructions" section (steps 1-7), for important locating information prior to proceeding. Remember to make the appropriate deduction (see below), prior to cutting.

Dimensions:



- A. _____ Cassette Housing: [**Deduct 11/16"**]
- B. _____ Side Profile with Magnetic Strip: [**Cut to Measurement-No Deduction**]
(On Double Doors a Second Housing Is Used-No Side Profile Is Needed)
- C. _____ Bottom Track: [**On Single Doors Deduct 1-3/4" / On Double Doors Deduct 3-3/8"**]
- D. _____ Top Track [**On Single Doors Deduct 1-3/4" / On Double Doors Deduct 3-3/8"**]

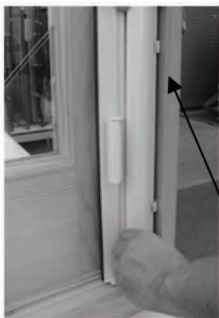


A). Standard Recessed Mount Clip Installation



B). Surface Mount Clip Installation
(Work Great On Sliding Patio Doors, etc.)

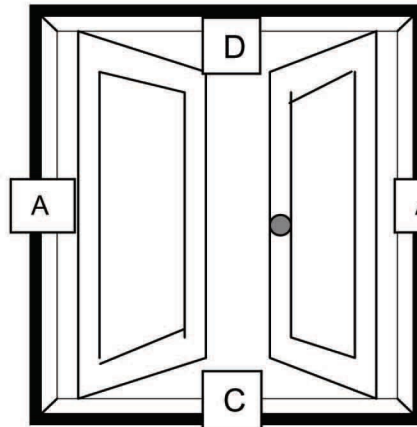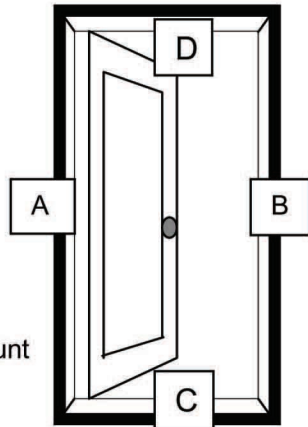

On Double Doors 2 Housings Are Used (No Side Profile)
Use Recess Style Mounting Clips

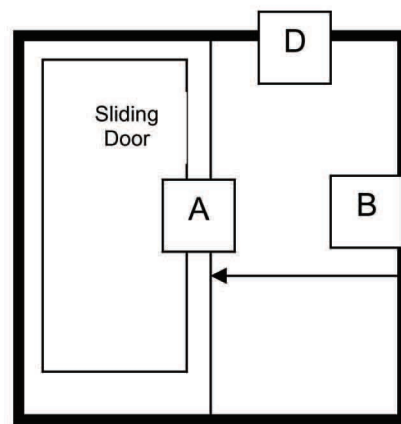

On Sliding Doors A Typical Installation Includes Mounting The Back Of Retractable screen Housing Approximately 1-1/2" in From Edge Of Stationary Door Panel Mullion Using The Optional Surface Mount Clips or Concealed Method (see separate gliding door instructions).